Operation

Height Adjustment

1. Loosen the handle on the holder.

2. Slide the holder up or down to the desired position and lock the holder by tightening the handle.

Handle

Holder Angle Adjustment

Method 1

1. The angle can be easily adjusted by placing the handheld shower in the holder and adjusted to the desired angle.

Method 2

1. If adjusting the angle proves to be challenging due with method 1, simply loosen the screw inside the holder and adjust the holder to the desired angle.

2. Tighten the screw inside the holder after adjustment.

NOTE: The angle of the holder may shift overtime, tighten this screw when needed.

Warranty

Limited Two (2) Year Warranty (For USA Only)


The manufacturer warrants this product to be leak and drip free during daily normal household use for as long as it is owned by the original purchaser of this product. Please keep a copy of the original invoice as proof of purchase.

Should a malfunction occur within the warranty period, Luxier USA will, as its option, (1) repair or replace the defective part(s) or product at no charge; (2) issue a refund of the purchase price paid for the product (Valid within 30 days from the date of purchase); or (3) issue a credit to be applied against the purchase of a new Luxier product. Shipping/delivery charges may apply and are in Luxier USA's sole discretion.

This limited warranty shall not apply to goods which have been subject to accident, negligence, improper installation, product abuse, product misuse, or use of cleaners containing abrasives, alcohol or other organic solvents, whether performed by a contractor, service company, or yourself, are excluded from this warranty.

Our responsibility under this warranty is limited to only to replacement parts and no other costs. Luxier USA will not be responsible for labor charges and/or damage incurred by installation, repair or replacement, nor for any indirect incidental or consequential damages, losses, injury or costs of any nature relating to this faucet. Except as provided by law, this warranty is in lieu of and excludes all other warranties, conditions, and guarantees, whether expressed or implied, statutory or otherwise, including without restriction those merchantability of fitness for use.

This limited warranty is non-transferable. This limited warranty only applies to products purchased and installed in the United States. This limited warranty covers the original consumer purchase only and does not include business, commercial or industrial use of this product. To obtain service under the Limited Warranty, please contact Luxier USA at support@luxierusa.com. The Luxier USA Customer Care Department will determine whether to repair or replace your product, issue a refund, or issue a credit.

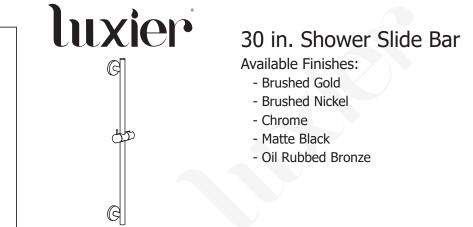

Important Information

- This installation guide is subject to change without notice
- Read and understand this installation guide completely.
- Observe all local plumbing and building codes. •
- This is only a general installation guideline, actual installation may vary. • Consult a professional if necessary.
- Product drawings in this installation guide is for illustration purpose only. Actual product may vary by models.
- It is recommended that the installation of this product be performed by trained and experienced installers.


Tools you may need

Screwdriver, power drill, tape measure, level, masking tape, pencil, silicone sealant, eye protection.

Maintenance Guide

Please follow the cleaning material manufacturer's instructions. Damage caused by improper treatment will not be covered by product warranty. In addition, pay attention to the following points:


- Regular cleaning can prevent mineral build up on surface. •
- Carefully read the cleaner product label to ensure the cleaner is safe for • use on the material.
- Test the cleaner on a small area before using on the entire surface. •
- Use a mild detergent such as liquid dishwashing soap and warm water • for cleaning.
- Do not use abrasive / harsh chemical when cleaning the fixture as they will damage and dull the finish.
- When using spray cleaners, spray first onto a soft cloth or sponge. • Never spray directly onto the faucet as droplets can enter openings and gaps and cause damage.
- After cleaning, rinse thoroughly with clean water to remove any cleaner residue. 1

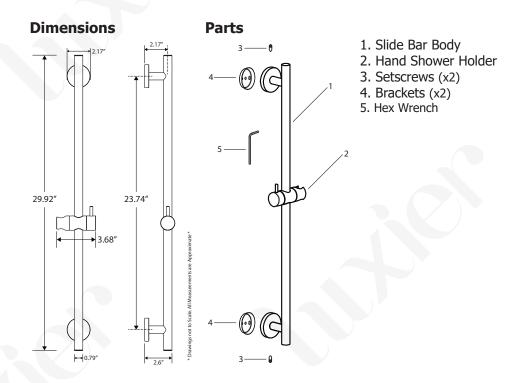

Installation (cont.)

2. Using a drill with tile bit, slowly drill into the tile. Use a level as a guide can ensure drilled holes are in vertical. Figure B. (NOTE: Use a small piece of painters tape or masking tape over the drilling area to prevent damages to the tiles)

3. Install the mounting brackets to the tile wall with screws.




В

Installation

IMPORTANT! This product should be mounted to stud framing supports at both top and bottom mounting locations. Plastic wall anchors will not support the slide bar. Do not depend on wall anchors for installation.

Tile/solid surface installation only!

1. Place the shower slide bar on the wall and roughly mark the positions of the 2 mounting brackets on the wall. (NOTE: Make sure the height is suitable for all users to reach. The final height should provide enough slack in the hose when choosing hand shower holder is raised to the most upper position.) Verify both marked locations are over a stud. The distance between 2 brackets should be 23.74" (603 mm) from center to center as shown in figure A.



3. Place the shower slide bar over the mounting brackets and secure the slide bar by tightening both setscrews with the hex wrench. This complete the installation of the shower slide bar.

